UNCLASSIFIED

Ballistic Research Laboratories

TECHNICAL NOTE NO. 554

000003

November 1951

Supersedent Super BRL M 633

DOES NOT CIRCULATE S

FRAGMENTATION OF SINGLE AND DOUBLE WALL CYLINDRICAL WARHEADS

This document has been approved for public release and sale; its distribution is unlimited.

The Ballistic Research Laboratories Technical Note is designed for use within the laboratories or for issuing available information, when the occasion demands speed.

The contents of this paper are of the nature of advance information and may be extended or otherwise revised.

ABERDEEN PROVING GROUND, MARYLAND

DOWNGRADED AT 3 YEAR INTERVALS DECLASSIFIED AFTER 12 YEARS DOD DIR 5200.10



DEFENSE SUPPLY AGENCY ENSE DOCUMENTATION CENTER

CAMERON STATION EXANDRIA, VIRGINIA 22314

NCLASSIFIED

IN REPLY REFER TO

1-2306 DDC-TCA

18 August 1971

Telephone

SUBJECT: Request for Scientific and Technical Reports

AC 202 27-46847

TO:

Commanding Officer

Army Ballistics Research Lab

Attn: AMXBR-XS

Aberdeen Proving Ground, 21005

- 1. The report referenced below is believed to be a DoD-funded document. It has not been located in the Defense Documentation Center (DDC) collection.
- 2. Current DoD directives require that copies of each report be forwarded to DDC. At least one (1) copy should be black printing on white background (or if typed, the ribbon copy) suitable for reproduction by photographic techniques.
- 3. Documents must be marked with an appropriate distribution statement according to DoD Directive 5200.20 (AR 70-31, NAVMATINST 4000.17, AFR 310-2). This includes information on the releasability of unclassified, unlimited documents for sale to the general public by the Clearinghouse for Federal Scientific and Technical Information of the Department of Commerce. These distribution statements are found on the reverse of this letter.
- .4. Return the copy of this letter as your reply marking the reverse accordingly, i.e.:
- a. When reports are forwarded, or have previously been forwarded, check and fill in statements opposite A or B as applicable, or
- b. If the document is not releasable to DDC, indicate the category of exception by checking the applicable statement under C.
- 5. A mailing frank is enclosed to use for shipment of documents. Enclosed are a DDC Form 50 and a DDC Form 79 which explains its use.

FOR THE ADMINISTRATOR:

3 Enci

1. Franked label

2, DDC Form 50

3. DDC Form 79

M. B. KAHN

Chief, Accessions Division

1-2306

Ballistics Research Lab - Aberdeen PG, Md

BRL-TN-554

gmr 1-230

00407

FL-88

Jun 70 ,

DISTRIBUTION STATEMENTS (Do D Dir. 5200, 20)

Statement No. 1 -	This document has been approved for public limited.	
IN ADDITION TO S (This phrase precede	ECURITY REQUIREMENTS WHICH APPLY TO es all the following statements when the docume	ent_is:classified).
Statement No. 2 -	This document is subject to special export of governments or foreign nationals may be made	
Statement No. 3 -	Each transmittal of this document outside the have prior approval of (controlling DoD office)	
Statement No. 4 -	Each transmittal of this document outside the approval of (controlling DoD office),	Department of Defense must have prior
Statement No. 5 -	This document may be further distributed by an of (controlling DoD office).	· • • •
A 🔯/	Copies are forwarded herewith,	, ·
B. The D	ocument was previously forwarded to DDC on	(date)
and th	ne AD number is	
	cordance with the provisions of Department of d is not supplied because:	Defense Instructions, the document re-
It is 7	TOP SECRET.	A Company of the Comp
It cont	ains cryptographic and communications security	· de .
<u> </u>	xcepted in accordance with DoD instructions pe	rtaining to communications and electronic
☐ It is a	registered document or publication.	reserved to the second
☐ It is a	್ , ನಿರ್ವಾಪರ n administrative paper, memorandum or report, a	dA - Wast Morasses blacks. 18% contract or grant proposal, or an order.
Other.	Release Statem	ient A WEELENAME
	Print or T	Type Name
. 4	Chief	raid Manifer

AUTHORIZED SIGNATURE

BALLISTIC RESEARCH LABORATORIES

TECHNICAL NOTE NO. 554

FRAGMENTATION OF SINGLE AND DOUBLE WALL CYLINDRICAL WARHEADS

Project No. TB3-Oll2A, of the Research and Development Division, Ordnance Corps

ABERDEEN PROVING GROUND, MARYLAND

FRAGMENTATION OF SINGLE AND DOUBLE WALL CYLINDRICAL WARHEADS

Static fragmentation tests were made to investigate the fragmentation characteristics of a double wall cylindrical warhead as compared to a single wall cylindrical warhead of the same overall dimensions. The purpose of these tests was to obtain a quantitative estimate of the difference in fragment mass, numbers, velocity and spatial distribution between a double and a single wall cylindrical warhead.

DESCRIPTION OF WARHEADS

Standard 3" M42Al shells were machined into cylinders 6" in length with the diameter dimensions as follows:

	Single Wall Cylinder	Double Outer	Wall Cylinder Inner Cylinder
Outside diameter	2.70"	2.70"	2.49"
Inside diameter	2.28"	2.49"	2.28"

Tolerances were held to within * .002". Fibre tubing machined down to the size of the cylinder was attached to each end (Figures 1 and 2). The fibre end extensions were used to reduce end effect which would change the fragmentation characteristics of the ends of the cylinders. The warhead was fully leaded with Composition C-3 and a tetryl booster was imbedded in the explosive near the initiated end. The weights of components, in grams, were as follows:

	Single Wall	Double Wall
Weight of outer cylinder	, , , , , , , , , , , , , , , , , , ,	658
Weight of inner cylinder	NEW PROF. CO.	607
Total weight of steel cylinders	126h	1265
Weight of fibre tubing, long	52	50
Weight of fibre tubing, short	36	33
Weight of fibre end disc, rear	15	22
Weight of fibre end disc, front	10	21
Weight of Comp C-3	862	835
Empty Weight	1377`	1391
Loaded weight	2239	2226

METHOD OF TESTING

The field set up for the single wall warhead consisted of placing seven cane fibre filled recovery boxes tangent to a circle of 6' radius measured from the center of the warhead, (Fig. 3). The warhead was suspended with its longitudinal axis vertical 3' h 1/h" above the ground level, as measured from the top of the warhead, and detonated with a 5/16" engineer's special electric blasting cap.

The field set up for the double wall warhead consisted of placing four cane fibre filled recovery boxes tangent to a circle of 12' 1-3/8" radius measured from the center of the warhead, (Fig. 4). One box (Box No. 3) was faced with .040" aluminum sheet painted black for the purpose of measuring the fragment velocity by the photographic method. Fragments were not recovered from that box. The warhead was suspended with its longitudinal axis vertical 6' above the floor level, as measured from the top of the warhead, and detonated with a 5/16" engineer's special electric blassing cap.

RESULTS

The percent of the total number of fragments recovered in various weight intervals is given in Table I. The "predicted" values (Column 5) of the double wall warhead were obtained from the mass distribution of the single wall warhead by assuming that the fragments in each weight interval were reduced in mass by 1/2 and doubled in number. It can be seen that the "predicted" values for the double wall warhead are in good agreement with the observed values, indicating that the breakup of the single and double wall warheads were the same with respect to the length and width of the fragments and differed only in thickness. It should be noted that the fragments from 0-10 grains and 0-5 grains of the single and double wall warheads respectively were not considered. If the small fragments were included the two for one breakup of the larger fragments is not evident. This can be seen by examining Table II or Figure 6 where the fragment recoveries, including the smallest fragments recovered, are given. The reason that the two for one breakup is not evident in Table II is not known but it appears that either the breakup of the small fragments is different than the large fragments for the two warheads or the recovery of the small fragments was not complete.

The average weight of recovered fragments greater than 10 grains, single wall, is 34.0 grains, and average weight greater than 5 grains, double wall, is 15.3 grains.

Figure 5 shows fragments recovered from one recovery box for each warhead. The lengths and widths of the larger fragments from the single wall warhead are roughly equal to the lengths and widths of the larger fragments from the double wall warhead. The thicknesses of the double warhead fragments are roughly one-half that of the single wall warhead fragments.

The weight of fragments recovered from the cane fibre board was 83% for the single wall warhead and 84% for the double wall warhead with respect to the theoretical recovery computed from the known geometry of the test setup.

The computed initial fragment velocity for either warhead is 5100 £t/sec as determined from Gurney's formula using the total explosive weight contained in the steel cylinder for C and the steel cylinder weight for M. The observed average initial fragment velocity was not measured for the single wall warhead, but was 5700 f/s for the double wall warhead. This higher value may not be significant and further checks are necessary. It does appear, however, that there is little, if any, loss in fragment velocity due to the use of a double wall.

The spatial distribution of fragments from the double wall warhead was satisfactory in the sense that adjacent fragments from each cylinder were separate in space and showed no evidence when recovered of being fused together. Fragment holes in the first sheet of the celotex appeared to be randomly spaced and there was no evidence of pairing of the fragments.

SUMMA ÉY

For the present experiment, a double wall reduced the weight of and increased the number of fragments by an amount which is predictable from the fragments of a single wall warhead, except for the smallest fragments. If the smallest fragments are excluded, the observed average reduction in weight was about 1/2, the number increasing by a factor of 2. One possible application of multi-wall casings is for high explosive artillery or mortar shell where the present weight of the larger fragments is heavier than is necessary against personnel.

Cylindrical warheads of thicker casings and more layers are being made for the purpose of investigating further the fragmentation characteristics of multi-wall cylindrical warheads.

^{1.} Gurney, R., "The Initial Velocity of Fragments from Bombs, Shells, and Grenades," BRL Report No. 405.

TABLE I

Comparison of Fragment Mass Distribution by % of Number Recovered

SINGLE WALL	HA RHEAD	יסת -	BLE WALL WARHEAD	
Weight Interval Grains	Percent of Total Number Recovered	Weight Interval Grains	Percent of Total Number Recovered	Predicted Percent of Total Number
10-20	31.11	5-10	36.48	31.41
20-30	25.00	10-15	22.64	25.00
30-40	16.03	15-20	17.61	16.03
40-50	8.33	20-25	8.81	8.33
50-60	8.97	25-30	6.28	8.97
6070	3.85	30-35	5.03	3.85
70-80	. 64	35-40	.63	·6li
80-90	2,56	40-45	2,52	2,56
90-100	.64	45-50	0	. 6lı
100-110	•611	50-55	o	.64
110-120	1.29	55-60	O	1.29
120-130	0	. 60-65	o	.0
130-140	. 64	65-70	0	•64

TABLE II
Weight Distribution of Fragments

									-			
Wt.	Interval Grains	0-5	5-10	10-15	15-20	20-25	25-30	30-35	35-40	40-45	45-50	50-55
Warhead	Observed Number	352	50,	29	20	21.	18	1 ħ	11	5	8	9
	% of Total Number	63.08	8.96	5.20	3.58	3.76	3.23	2.50	1.97	•90	1.43	1.61
le Wall	Weight	400.15	354.47	359.57	343.36	469.29	495.21	453.08	402.40	203.70	381.94	476.54
Single	\$ of Total Weight	6 .6 9	5.93	6.01	5.75	7.85	8.29	7.58	6.78	3.44.	. 6.39	7.98
Warhead 2	Observed Number	98	58	36	28	14	10	8	1	L.	O	· · · · · ·
	% of Total Number	38.13	22.57	14.01	10.89	5.45	3.89	3.11	•39,	1.56	0	. !-
e Mall	Weight	220.37	400.15	439.19	468.98	307.87	273,30	253.39	35.65	166.82	o: /	F.
Double	% of Total Weight	8.59	15.60	17.12	18.27	12.00	10.65	9.88	1.39	6.50	0	,


TABLE II (contd)
Weight Distribution of Fragments

<u>.</u>	Interval Grains	110-115	115-120	120-125	125-130	130-135	135-140
Warnead	Observed Number	1	1	0	0	1	0
Wall Way	8 of Total Number	.18	.18	0	0	.18	0
	Weight	113.13	115.89	. 0	0	133.64	0
eraure	% of Total Weight	1.90	1.95	0	0	2.25	0

TABLE II (contd)
Weight Distribution of Fragments

Interval Gra	ins 55-60	60-65	65-70	7 0-75	75-80	80-85	85-90	90-95	95-100	100-105	105-110
Observed Number	5	6	0	0	. 1	3	1	1	0	1	Ó
% of Total Number	-90	1.08	0	0.	.18	•5l	.18	.18	o o	.18	0
Weight	286.42	375.46	. 0	0	79+32	21,5.06	88.12	93.21	0	101.70	^
% of Total Weight	4.79	6.28	0	0	1.33	4.10	1.47	1.57	0	1.70	0


FIGURE I
SINGLE WALL CYLINDRICAL WARHEAD

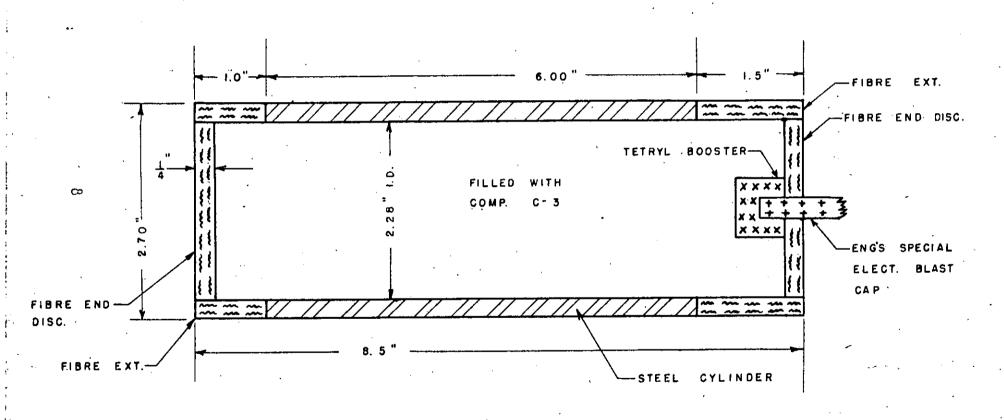

CYLINDER NACHINED FROM STANDARD
3" M 42AI SHELL

FIGURE 2


DOUBLE WALL CYLINDRICAL WARHEAD

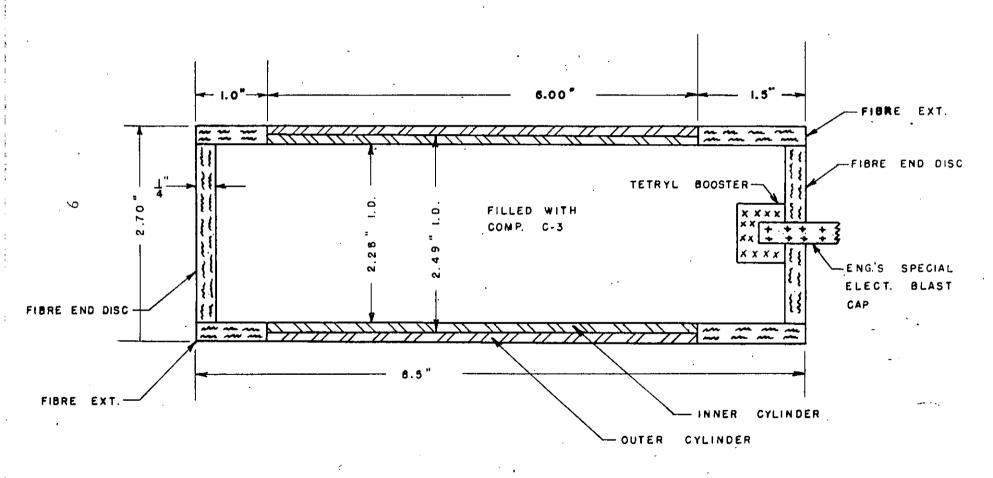

CYLINDERS MACHINED FROM STANDARD


3" M42A: SHELL

FIGURE 3
TEST SET-UP SINGLE WALL WARHEAD

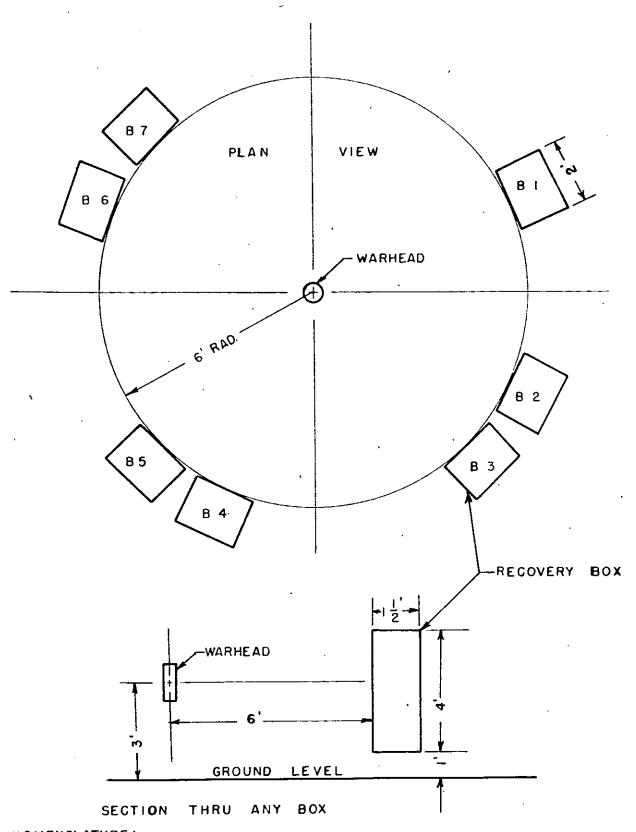

NOMENCLATURE:

BI-7 = RECOVERY BOX 4' X 2' X 12'

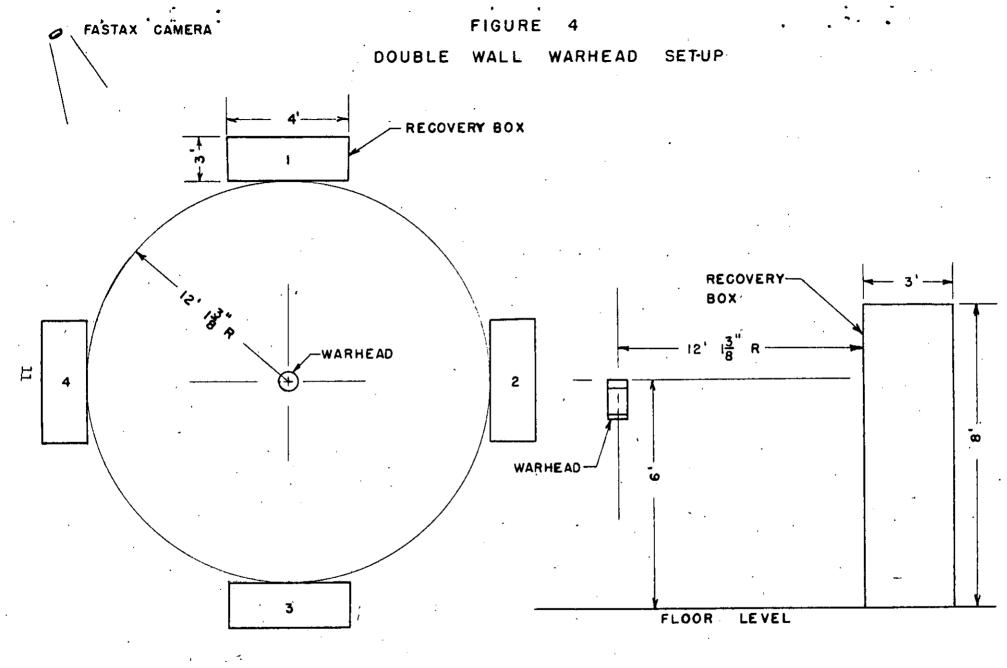

RECOVERY BOX NO. 3 FACED WITH .040" ALUMINUM SHEET PAINTED BLACK


| 1-2-3-4 = 8' X 4' X 3' CANE | FIBRE FILLED RECOVERY BOX

FIGURE 5 FRAGMENTS FROM SINGLE AND DOUBLE WALL CYLINDRICAL DOUBLE WALL WARHEAD SINGLE WALL WARHEAD

0-120 GRAINS

0-45 GRAINS

						S
						lg E
						IS P
						lå
						la
						10
						18
		(0.00)				l _a
						2
	8 8 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1					12
						49
						T 8
CARLOS TRA AS TABLES TO SECURITY OF THE SECURI						llo P
117 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1						9
						4-1-25-00-5-1
						19
MISCESSI PARTER PARENCE E		The second of th	the state of the bound of the		ON STREET OF STREET	10.00
				CHECONSE		4 0 \$
		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				THE STATE OF



DISTRIBUTION


No. of Copies

- The New Mexico Institute of
 Mixing and Technology
 Research & Development Bivision
 Socorro New Mexico
 Nota: (E. J. Wirksen
- 2 Director
 Central Air Documents Office
 U. B. Building
 Dayton 2, Ohio
 Attn: CADO-D
- 2 Commanding Officer Picatinny Arsenal Dover, New Jersey
- Applied Physics Laboratory
 Johns Hopkins University
 8621 Georgia Avenue
 Silver Spring, Maryland
 Attn: Mr. Arthur Norris

THRU:
Naval Inspector of Ordnance
Applied Physics Laboratory
Johns Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland

1 Director
Naval Research Laboratory
Anacostia Station
Washington 20, D. C.
Attn: Dr. Irwin

Chief of Ordnance Washington 25, D.C. Attn: ORDTB-Bal Sec

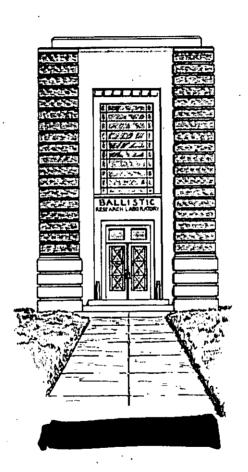

UNICIASSIFIED

FIELD PRINTING PLANT THE ORDNANCE SCHOOL ASERDEEN PROVING GROUND